AlarmSecur.com®

Connect system to new router

Click this symbol in right top corner and click add system.
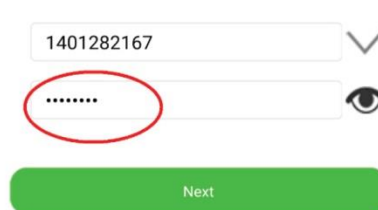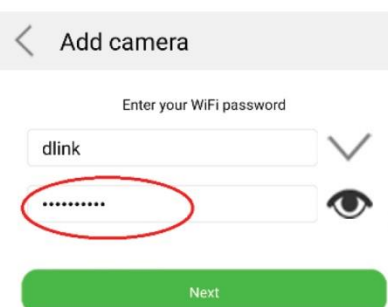**Attention:** System and phone must both be within 2 meters of the router when programming. System should NOT be connected by LAN cabel to router. This cable can be connected to system after connecting the system

Type in password of the wifi network.
Be sure phone and system are on same WIFI network.
Click next

Type in password system (Apple only) Click next Android will automatically connect. For apple follow the instructions on the second page.

Serial No:
1401282167
Password:
28374D64
IP addr: 192.168.139.139
Model: AS-196   DC5V/2000mA

After adding succesfully the following screen is visible. Determine system name and press green button.. Than the system will configure. When the red screen is gone the system is connected again to the new WIFI.

Overview
My Device   Home   Company
Living room
1401282016
Last access:2015-12-02 20:17:44
Device is initializing. Please wait

Overview
My Device   Home   Com
Arm   Disarm
Alexand
1401282
Last Ac   Add Camera

Add camera
Enter your WiFi password
dlink
••••••••••
Next

1401282167
••••••••
Next

AlarmSecur.com
Camera ID:1401282167
Camera Status:WiFi config OK
Camera name
Add to account

ONLY FOR APPLE IOS

Change WIFI network manually in setting to camera network Password: 12345678, to connect.

Let op!
Please change the iOS Device wifi setting. Connect to Camera WiFi (SSID: "LiveCloud_1401282021") using Password "12345678"
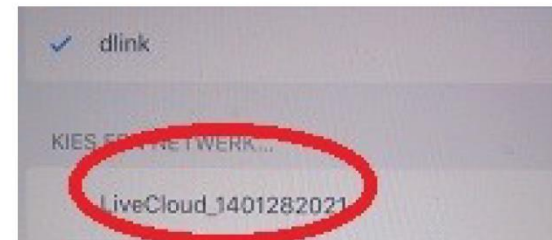
OK

Press this button

Go to settings, click WIFI

Instellingen

Select WIFI network : LiveCloud_1401XXXXXX

✓ dlink

KIES EEN NETWERK...

LiveCloud_1401282021

Press home button and return to the app. Than press green button in the app.