

TH661 Wi-Fi Smart AI **Security Camera**

Quick Installation Guide

www.alarmsecur.com

Installation

Download the LiveCloud APP

Note: Have your Wi-Fi password available before installation.



- Make sure WIFI is enabled on your mobile
- Search for "LiveCloud" in the App Store or Google Play.
- Download the Livecloud app.








Registration

- Open the LiveCloud application and click register.
- Enter mobile phone number and Enter the security code.




- Enter a password (determine yourself, only numbers and letters).
- Enter password again.
- Enter SMS code sent to the mobile phone number.
- Click on the red button.





Connect the power cord

- Plug the power cord's end into the camera.
- Plug the power cord's into the wall outlet adapter, and plug your camera into a power outlet.
- Wait about 1 minute, then next.



Connect to mobile device

- Enable WIFI on your mobile device.
- Open the app and fill in the following detials:
 - 1. Mobile phone number entered at registration.
 - 2. Enter own password.
 - 3. Enter security code into the white field (9769).
 - 4. Tick box remember password.
- Click + button.





Note: Camera and mobile phone should be programmed within 2 meters of the router.

- Click Add WiFi device.
- Select WIFI network and enter password WIFI network - Click on the green button.

. Add WiFi device Add network connected device

ONLY FOR APPLE IOS

- 1. Go to settings, click WIFI.
- 2. Select WIFI network: LiveCloud_1401XXXXXX, to use this network.
- 3. return to application. Click on the green button.
- Select the device and click Next.
- The device will automatically configure the system until it succeeds.
- Click on the green button to add the current account.

Note: If the device is not searched, please initialize the device and add it again.





Settings

Add sensors

- Go to the home page of the device and click top right button.
- Add 1 sensor by activating them manually:

Door sensor

Press on the button (blue light).

Movement detector (PIR)

Wave your hand in front of the sensor (blue light).

Smoke detector

Press the 'Remote' button.

Remote control

Press the top button.

 Type in location and click the green button.

■ My device +



Set Autofocus

- · Click secsor enter the settings page.
- Choose PTZ trace.
- Use the arrows to adjust the camera into the required position.





Click on the change and Enable Trace.

Note: When sensor is activated camera moves automatically into the preset position.


The system will record 2 seconds BEFORE activation and shoots a photo when into position.



Activate online storage

· Click on Storage.

Note: If you have no Dropbox account you can create one for FREE at www.dropbox.com.



- Fill in emailaddress and Dropbox password and click green button.
- This screen is shown when connected succesfully.

Privacy: AlarmSecur has no access to your Dropbox account and the data within.All recordings are directly stored to your Dropbox.










Camera overview

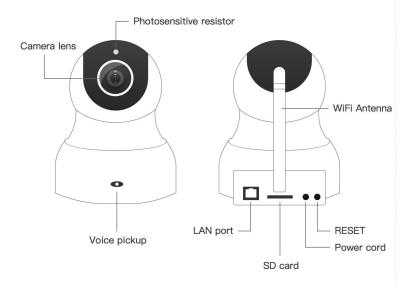

Note: If your Wi-Fi connection fails or you need to connect to a different Wi-Fi network, insert one end of a paperclip into the reset hole. Press and hold it for 5 seconds until you hear a chirp.

Note: You can insert a compatible SD card, up to 128GB. It stores 24/7 video and auto loop cover old video.

FAQ

- How to add users?
 - A. Press the button of the Users .
 - B. Click top right button.
 - C. Before adding a user he must register first .
- How to download movie after notification?
 - A. With every notification you receive a push alarm.
 - B. This notification contains a photo and a video.
 - C. Press download to view the video.
 - D. You can also watch later by going to the right corner in the overview and press my alarms.
- How to updated system?
 - A. Press the button of the Detail.
 - B. Click to UPGRADE.
- How to activate online cloud storage. Needed to receive photos and videos with every notification?
 - A. Click on Storage.
 - B. Select Dropbox and click green button.
 - C. Fill in email address and Dropbox password and click green button.
 - D. This screen is shown when connected successfully.